

# SLIM

## CLASSIC MODELS

### Features



- Specialy designed for extract ventilation
- Wall and ceiling mounting
- Easy installation and maintenance
- Continuous operation
- Backdraft damper
- Ball bearing motor



**Air flow:**  
up to 305 m<sup>3</sup>/h  
85 l/s



**Power:**  
from 14 W  
**SFP:**  
from 0.28 W/l/s



**Noise level:**  
from 33 dBA



### Options




Model	Slim 100/125/150				
Option	S	T	ST	H	SH
Pull-cord switch	•		•		•
Timer		•	•	•	•
Humidity sensor				•	•

- Turn-off delay adjustable from 2 to 30 min.
- Humidity setpoint adjustable from 60 % up to 90 %.

### Technical data


Model	Slim 100	Slim 125	Slim 150
Voltage [V/Hz]	220-240/50	220-240/50	220-240/50
Power [W]	14	16	24
Current [A]	0.085	0.1	0.13
Air flow [m <sup>3</sup> /h (l/s)]	105 (29)	190 (53)	305 (85)
SFP [W/l/s]	0.48	0.3	0.28
Noise level [dBA]	33	34	37

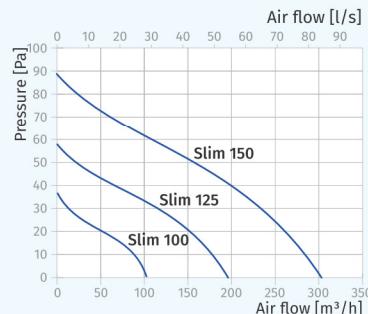


### Designation key

Slim	100	SH
Model	Spigot diameter	Option

### Overall dimensions and mounting

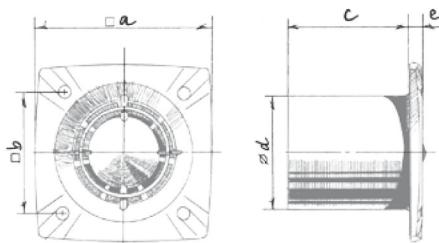

Dimensions [mm]	a	b	c	Ø d	e
Slim 100	150	120	111	100	15.7
Slim 125	176	140	115	125	14.5
Slim 150	205	165	134	150	16

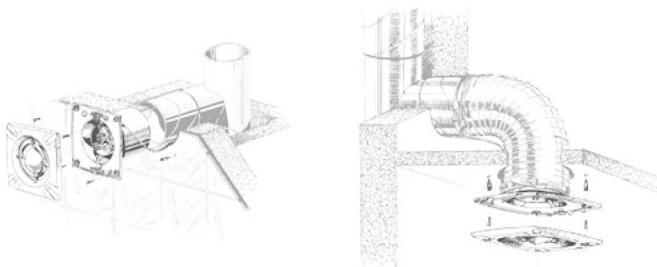

### Accessories

Duct system	Flexible air ducts	Grilles and hoods	Speed controllers	Clamps